

Soltis Lounge 96



Soltis Lounge 96



Natural light, modernity and comfort

Soltis Lounge 96 is the ideal fabric for furnishing your terrace or patio. Its micro-perforated design protects you from the sun's light and heat, while allowing air to pass through it. This provides you with shade similar to that of a tree.

Retractable awnings

■ Micro-perforated fabric

The fabric's micro-perforations allow air to circulate.

This avoids the greenhouse effect usually felt beneath a standard acrylic fabric.

■ Natural light

The fabric's open nature allows light into your house. You'll enjoy natural light as well as a glare-free outward visibility.

■ Enduring colours

Pergolas and velums

Shade sails

The fabric's unique design and its enduring, plain colours bring a touch of modernity to your terrace or patio.

■ Durability

The colours' high UV resistance guarantees your fabric's long-term aesthetics. Its smooth surface resists dirt, mould and facilitates cleaning.





Micro-perforated fabric for a feeling of coolness



Prepare for your summer and enjoy your terrace or patio WITH A SOLTIS LOUNGE 96 FABRIC!



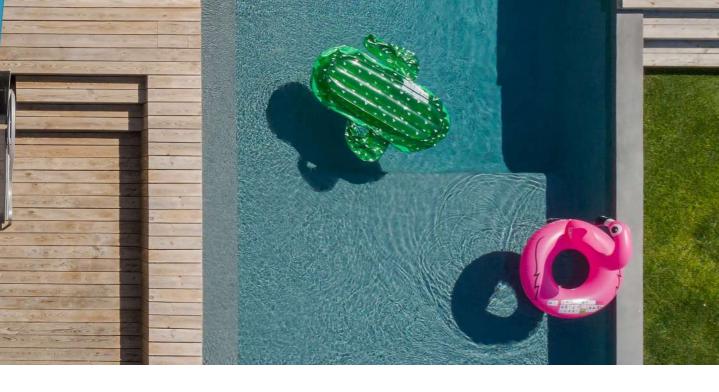

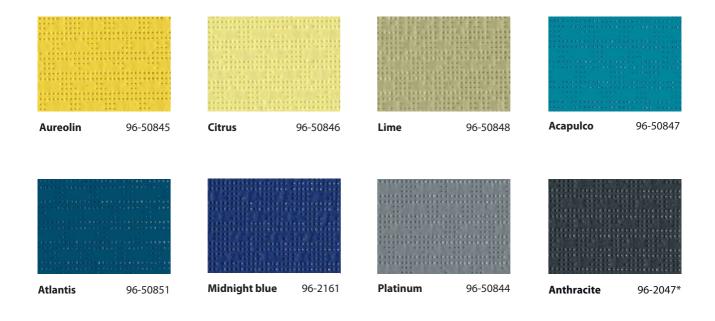



^{*} Colours available in Soltis Proof W96 waterproof version

Exclusive Précontraint® technology

This unique, world-patented technology involves maintaining the composite in bi-axial tension throughout the manufacturing cycle. It ensures our materials' exceptional performance characteristics, which exceed market standards in terms of long-term stability, strength, coating thickness and flatness.



Solar and light properties (based on EN 14501)



* Based on a solar factor for glazing type D (g=0.32 – U=1.1) calculated using ISO 52022-3 -Method 2

***	very little
	enect
***	little effect
****	moderate
	effect
***	good
***	excellent

Soltis Lounge 96

	Technical properties	Standards
Openess factor	4%	
Weight	400 g/m² • 11.8 oz/sq.yd	EN ISO 2286-2
Thickness	0.45 mm • 450 microns	
Roll width	120 cm - 267 cm • 47.2 in 105.1 in.	
	■ Roll length	
Standard piece size	40 lm • 43.7 yd	
	Physical properties	
Tensile strength (warp/weft)	220/220 daN/5 cm	EN ISO 1421
Tearing strength (warp/weft)	30/25 daN	DIN 53.363
	Reaction to fire	
Rating	M2	NFP 92-507
Euroclass	B-s2,d0	EN 13501-1
	Management system	
Quality		ISO 9001
Environmental		ISO 14001
Energy		ISO 50001

■ Tools and services

Précontraint®

Technology

Tool for evaluating the energy savings that can be achieved with Soltis solar protection: SOLTISSIM. Contact your Serge Ferrari representative.

Quoted technical characteristics are average values subject to +/-5% tolerance.

The purchaser of our products is responsible for their application or transformation in relation to possible third party rights. Moreover, the purchaser of our products is responsible for their installation and usage in compliance with the standards, working practices and safety regulations of their destination country. Please refer to our warranty document with regard to contractual liability.

Values quoted in this document are commonly used test results for design purposes. They are given for information only in order to offer our customers optimum usage of our products. Our products are subject to improvements resulting from technical developments and we reserve the right to modify their characteristics at any time. The purchaser of our products is responsible for checking the above data.





5-year

warranty

¹"+=0" logo: summarises the Serge Ferrari Group's commitment to CSR, to align economic performance and positive impact. Find out about our concrete actions in our CSR report.